

403P SERIES

A powerful and versatile open platform system
for your additive manufacturing needs

www.farsoon.com



EFFICIENCY

Combining scan speed of up to 15.2 m/s with a high efficiency roller system and convenient removable powder cartridge system, the 403P offers increased productivity and lower price per part.

ACCURACY

The 403P series' powerful eight-zone heater & intelligent thermal control systems allows for best in class temperature regulation enabling less deformation and increased accuracy in final parts.

HIGH TEMPERATURE

The 403P series is offered in a high-temperature-capable configuration. Enhanced temperature shielding, laser power and thermal controls enable the HT403P to process high-performance materials, such as PA6, for direct-use applications.

OPEN PLATFORM

Farsoon is the only laser sintering system producer that allows for complete freedom of operation of its machines. This means that machine parameters and powder choice are unlocked for the user allowing for previously-impossible levels of freedom and flexibility when it comes to PLS production.



12 rue Jean Bart
78960 Voisins le Bretonneux

Tel: + 33 (0)1 30 60 03 33
Email: devis@3dsolutions.fr
www.3dsolutions.fr

FARSOON 403P SERIES

3D SOLUTIONS


TECHNICAL DATA	HS403P	HT403P
External Dimensions (L×W×H)	2470×1500×2145 mm	
Build Cylinder Size ¹ (L×W×H)	400×400×450 mm	
Net Weight	Approx. 3060 KG	
Laser Type	CO ₂ Laser, 1×60W	CO ₂ Laser, 1×100W
Scanner	High-precision three-axis digital galvo system	
Layer Thickness	0.06~0.3 mm	
Volume Build Rate ²	Up to 2.7 L/h	Up to 4.0 L/h
Scanning Speed	Max. 10 m/s	Max. 15.2 m/s
Max. Chamber Temperature	190°C	220°C
Thermal Field Control	Eight-zone heater & Intelligent temperature control systems	
Temperature Regulation	Continuous real-time build surface temperature monitoring & optimization	
Operating System	64 bit Windows 10	
UI Mode	Real-time interchangeable expert mode and production mode	
Comprehensive Software	BuildStar®, MakeStar®	
Data File Format	STL	
Key Software Features	Open machine key parameters, real-time build parameter modification, three-dimensional visualization, diagnostic functions	
Inert Gas Protection	Nitrogen	
Power Supply	EUR/China: 380-400V, 50/60Hz, three-phase US: transformer sold with machine	
Operating Ambient Temperature	22-28°C	
Materials	FS 3300PA, FS 3250MF, FS 3401GB, FS 3400CF, FS 4100PA, Ultrasint X043, Ultrasint X028 (Ultrasint X028/X043 for HT403P only), FS 1092A-TPU, FS 1088A-TPU (TPU for HT403P only)	

¹ The functional build volume depends on the parts/materials.

² Volume build rate depends on the parts/materials.

Many factors may affect the performance characteristics of products. We recommend that you make tests to determine the suitability of a product for your particular purpose prior to use. Farsoon makes no warranties of any type, express or implied, including but not limited to, the warranties of merchantability or fitness for a particular use. This also applies regarding the consideration of possible intellectual property rights as well as laws and regulations. Farsoon reserves the right to change the technical data without notice. Farsoon®, Buildstar®, Makestar® are registered trademarks of Farsoon Technologies. Last Change: 2020-02-10

PART: REAR VIEW MIRROR HOUSING
MATERIAL: Ultrasint X043
SYSTEM: HT403P

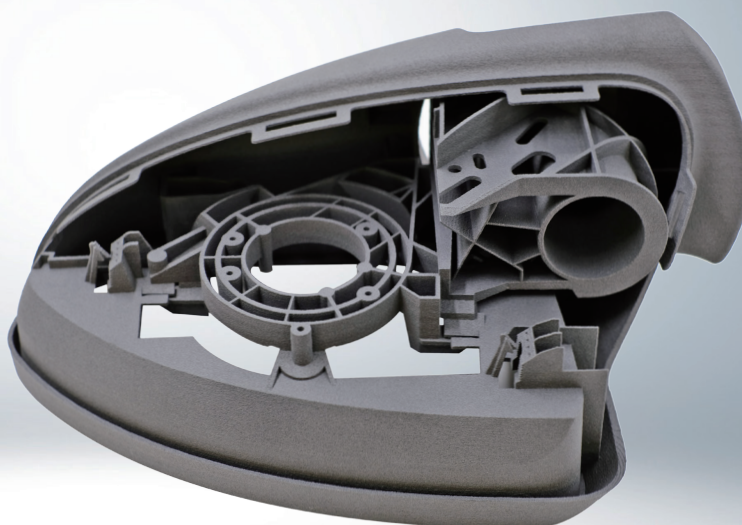

www.farsoon.com

AMEA Farsoon Technologies | +86.731.8397.6198 | globalinfo@farsoon.com | No. 181 Linyu Road, Changsha National High-Tech Industrial Zone, Hunan, China

AMERICAS Farsoon Technologies - Americas | +1 512-686-2866 | info@farsoonam.com | 3141 Eagles Nest Blvd., Suite 230, Round Rock, Texas 78665

EUROPE Farsoon Europe GmbH | +49.711.67400306 | wehelpyou@farsoon-eu.com | Curiestr. 2, 70563 Stuttgart, Germany